

PERFORA


222-00075

PERFORA L PD SUSPENSION made of aluminium, white, similar to RAL 9003, polycarbonate cover beam 113°, light output direct, UGR <22, with converter, max. 1500mA, dimmability: DALI 2, Push, cable Tension control in the suspension ropes, adapter/ceiling base white, pendant length 2000mm, IP20 cable length 2000mm



DRAWING

TECHNICAL DETAILS

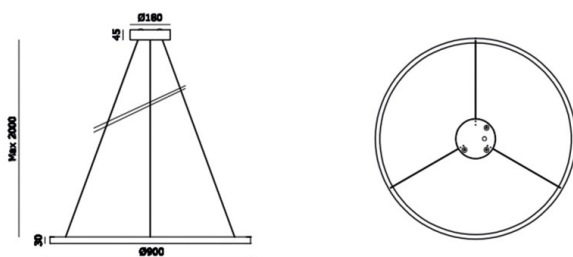


System perform. [W]	65
Bulb type	LED
Luminous flux [lm]	2890/3180
Current sec. [mA]	1500
Colour temp. [K]	2700/3000K
CRI	>90
UGR	<22
Optics	polycarbonate cover
Converter	with converter
Light output	direct
Beam angle [°]	113°
Voltage [V]	220-240V 50Hz
Material	aluminium

Height [mm]	30
Pendant length [mm]	2000
Diameter [mm]	900
IP protection class	IP20
Voltage class	protection cl. I
Shock resistance	IK02
Net weight [kg]	2,90

LIGHT DISTRIBUTION CURVE

Colour lamp	white
RAL	9003
Colour adapter/ceiling base	white
Electric wire	Tension control in the suspension ropes
EAN-Number	9010870314023
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	E
No. of luminaires B16A	25

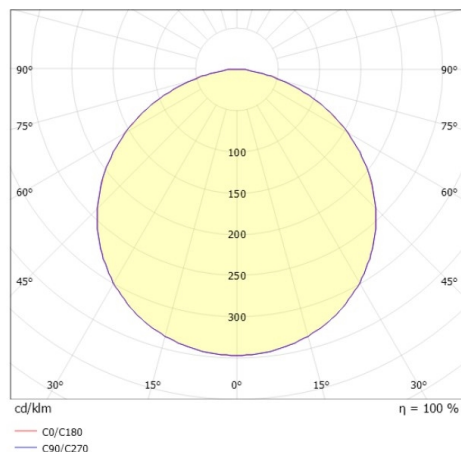

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.