


## PERFORA

222-00157

PERFORA PRO L SUSPENSION made of aluminium, black, similar to RAL 7021, lens optic with anti-glare grid light output direct / indirect, UGR <19, with converter, dimmability: DALI 2, Push, cable transparent, adapter/ceiling base black, pendant length 4000mm, IP20



## DRAWING

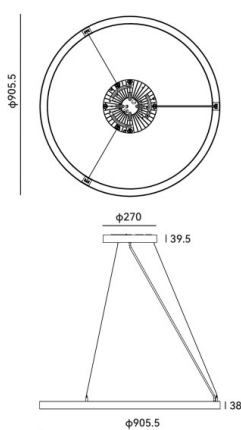

## LIGHT DISTRIBUTION CURVE

## TECHNICAL DETAILS

System perform. [W]	60
Bulb type	LED
Luminous flux [lm]	3120lm direkt / 6240lm indirekt
Colour temp. [K]	2700/3000K
CRI	>90
UGR	<19
Optics	lens optics with glare control louvre
Converter	with converter
Light output	direct / indirect
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Height [mm]	38
Pendant length [mm]	4000
Diameter [mm]	905
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	4,50
Colour lamp	black
RAL	7021
Colour adapter/ceiling base	black
Electric wire	transparent
EAN-Number	9010870561625
Lifetime [h]	50 000 L80 B10
Energy efficiency cl.	F



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.