

**Artikel Nr.: 862205**

Netzgerät, BASIC, DIM, CC, D50020UF/20W












IP20 

**Elektrische Daten**

Betriebsart	stromkonstant	Eingangsspannung	220-240V AC/50-60Hz
Leistung	10,00-20,00 W	Leistungsfaktor	0,95
Ausgangsspannung	20-40V DC	Anschlußmöglichkeit	offene Kabel
Ausgangsstrom	500 mA		

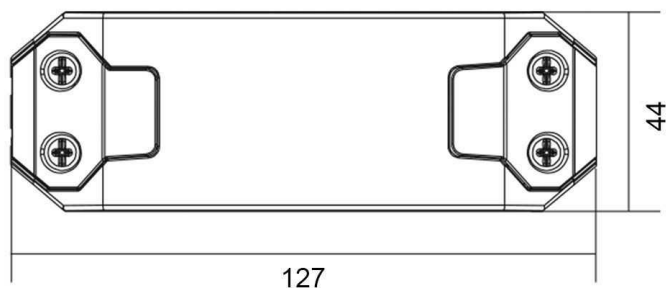
**Produkteigenschaften**

 Schutzklasse II	 Überspannungsschutz
SELV Schutzkleinspannung	 Lampenbetriebsgerät 110
 Kurzschlußfest	 Möbeleinbau geeignet
 Überlastschutz	ErP Standby-Stromverbrauch < 0,5 W
 Übertemperaturschutz	LVD Sicherheit nach EN 61347
 Sicherheitstrafo	EMC Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
 dimmbar - Phasen-/abschnitt	EMC Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

**Artikel Nr.: 862205**

Netzgerät, BASIC, DIM, CC, D50020UF/20W

**Abmessungen und Gewicht****Grenzwerte**

Länge	127,00 mm	Betriebstemperatur	-20°C - +45°C
Breite	44,00 mm	Gehäusetemperatur	90 °C
Höhe	28,00 mm	max. Menge Sicherungsautomaten	B10A=11, B16A=18, C10A=24, C16A=39
Durchmesser	0,00 mm	max. Einschaltstrom	15A/300µs
Gewicht	120 g	kapazitive Last	

Article No.: 862205

Power supply unit, BASIC, DIM, CC, D50020UF/20W

















IP20 CE

### Electrical Characteristics

Operating mode	constant current	Input voltage	220-240V AC/50-60Hz
Power	10,00-20,00 W	Power factor	0,95
Output voltage	20-40V DC	Connection possibility	wire with open ends
Output current	500 mA		

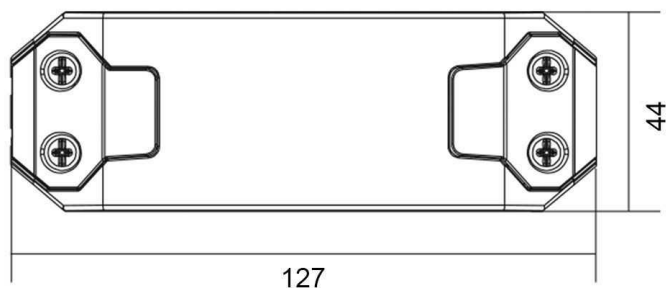
### Product features

	Protection class II		Overvoltage protection
	Low voltage protection		Lamp control gear 110
	Short circuit protection		Suitable for furniture installation
	Overload protection		Standby-power consumption < 0,5 W
	Overheating protection		Safety according to EN 61347
	Safety transformer		Interference suppression + immunity according to EN 55015 + EN 61547
	dimnable - leading/trailing edge		Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

**Article No.: 862205**

Power supply unit, BASIC, DIM, CC, D50020UF/20W

**Dimensions & Weight****Absolute maximum ratings**

Length	127,00 mm	Operating temperature	-20°C - +45°C
Width	44,00 mm	Case temperature	90 °C
Height	28,00 mm	max. amount of circuit breakers	B10A=11, B16A=18, C10A=24, C16A=39
Diameter	0,00 mm	max. inrush current	15A/300µs
Product weight	120 g	capacitive load	