


Cover FOLED-27

Ref. B17045S, B17039B

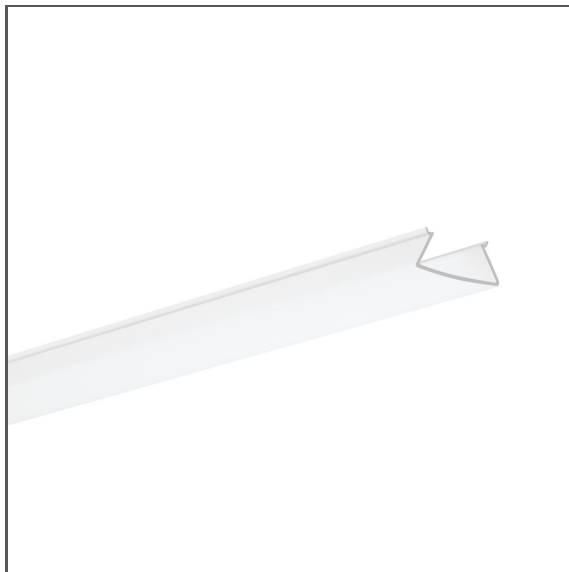

- Resistance to weather conditions

APPLICATION

- LED protection and light diffusion in lighting fixtures


MOUNTING

- Snapped in a dedicated profile

ADDITIONAL INFORMATION

- ATTENTION! rigid cover, not intended for bending or deformation
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS


Material	PMMA
Shape	flat
Maximum length on request	6000 mm
Width	26.9 mm
Possibility of obtaining a line of light	yes
UV resistance	yes

Finish	Light transmission	Length	Ref
satin	74 %	1000 mm	B17045S_1
		2005 mm	B17045S_2
		3010 mm	B17045S_3
black	24 %	1000 mm	B17045B_1
		2005 mm	B17045B_2
		3010 mm	B17045B_3

RELATED PROFILES > STRETCH CEILINGS



FOLED
A08332V1



FOLED-BOK
A08334V1



FOLED-SUF
A08333V1