


# Cover PIKO-7R

Ref. B17164S, B17164T, B17164B

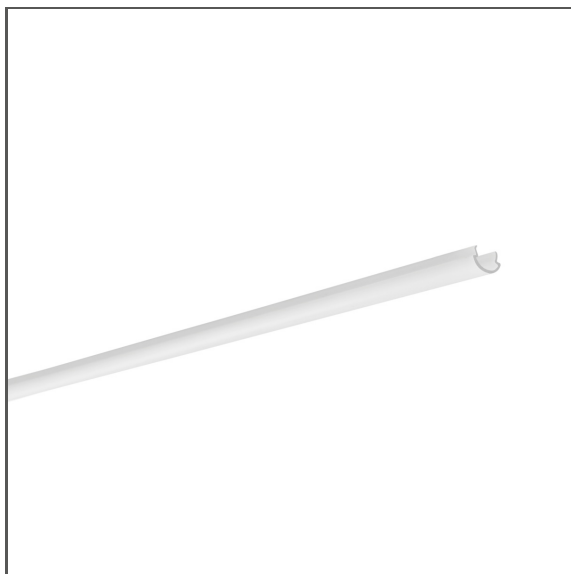

- Excellent light dispersion
- Resistance to weather conditions

## APPLICATION

- LED protection and light diffusion in lighting fixtures


## MOUNTING

- Snapped in a dedicated profile

## ADDITIONAL INFORMATION

- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance  $\pm 1.5$  mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

## TECHNICAL DRAWING



## TECHNICAL SPECIFICATIONS

Material	PMMA	Finish	Light transmission	Length	Ref
Shape	round	satin	52 %	1000 mm	B17164S_1
Maximum length on request	6000 mm			2005 mm	B17164S_2
Width	9 mm			3010 mm	B17164S_3
Possibility of obtaining a line of light	yes	semi-transparent	93 %	1000 mm	B17164T_1
Possibility of bending	yes			2005 mm	B17164T_2
UV resistance	yes			3010 mm	B17164T_3
		black	24 %	3010 mm	B17164B_3
				1000 mm	B17164B_1
				2005 mm	B17164B_2

# Cover PIKO-7R

Ref. B17164S, B17164T, B17164B

## RELATED PROFILES > MINIMALISTIC



**PIKO-O**  
A01167